

# Pump Lifting Chain

Lifting Equipment Ltd




Pump lifting chains provide the ideal and only real solution for lifting out submersible pumps from waterworks, boreholes, sewers and any other underground areas where submersible pumps are used.

Our pump chains have a master link at every 1 meter increment to facilitate the easy fixing to the hoist with which the pump is being lifted. We can also supply the stainless steel shackles for fixing the chain directly to the pump. The fact that the chains are produced from stainless steel ensures longevity even in extreme conditions.




GRADE 50 stainless steel; supplied with a polished finish and available in chain sizes from 5mm up to 18mm

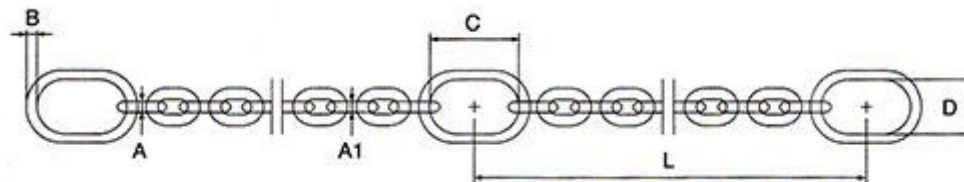


Material: Grade 50 AISI 316L Stainless Steel							Finish: Polished		
Part Code	Chain Size (mm)	A	A1	Dimensions (mm)			W.L.L. (t)	Weight Per M (Kg)	
				B	C	D	L (approx.)		
LGD 50/050	5	6	5	10	80	50	1000	500 Kg	0.65
LGD 50/075	6	8	6	13	110	60	1000	750 Kg	0.85
LGD 50/100	7	8	7	13	110	60	1000	1.0	1.20
LGD 50/125	8	10	8	16	110	60	1000	1.25	1.50
LGD 50/200	10	13	10	18	135	75	1000	2.0	2.50
LGD 50/320	13	16	13	22	160	90	1000	3.2	4.20
LGD 50/500	16	22	16	26	180	100	1000	5.0	6.10
LGD 50/630	18	26	18	32	200	110	1000	6.3	7.80

GRADE 316 stainless steel; supplied with a polished finish and available in sizes from 6mm up to 20mm.

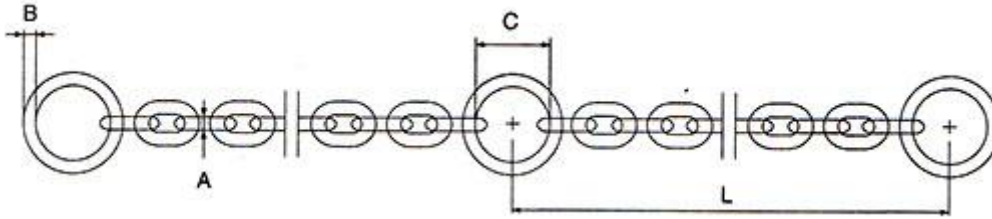

Material: 316 Stainless Steel							Finish: Polished		
Part Code	Chain Size (mm)	A	B	Dimensions (mm)		L (approx.)	W.L.L. (t)	Metre Per Drum	Weight Per M (Kg)
LGD 316/040	6	6	8	50		1000	400 Kg	500	0.90
LGD 316/063	7	7	10	50		1000	630 Kg	400	1.12
LGD 316/100	10	10	12	50		1000	1.0	200	2.50
LGD 316/150	12	12	16	140	75	1000	1.5	100	3.95
LGD 316/200	16	16	20	140	75	1000	2.0	50	6.60
LGD 316/300	16	16	22	140	75	1000	3.0	50	6.90
LGD 316/400	20	20	27	140	75	1000	4.0	50	11.50

GRADE 40 high tensile steel; with hot dipped galvanised finish and available in sizes from 6mm up to 26mm

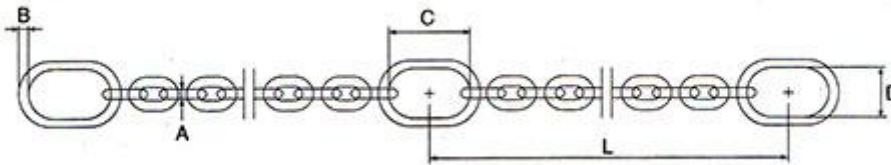

Material: Grade 40 High Tensile							Finish: Hot Dipped Galvanized		
Part Code	Chain Size (mm)	A	B	Dimensions (mm)		L (approx.)	W.L.L. (t)	Metre Per Drum	Weight Per M (Kg)
LGD 40/030	6	6	10	50		1000	300 Kg	500	1.10
LGD 40/050	8	8	12.5	50		1000	500 Kg	250	1.76
LGD 40/100	10	10	20	75		1000	1.0	100	2.90
LGD 40/200	13	13	20	140	75	1000	2.0	100	4.40
LGD 40/300	16	16	24	140	75	1000	3.0	100	6.70
LGD 40/450	20	20	27	140	75	1000	4.5	50	9.31
LGD 40/600	26	26	35	200	100	1000	6.0	50	17.50

**CALL US FOR MORE INFORMATION**  
**01384 76961**