

Electric Hoists

The Single Phase Heavy Duty

Lifting Equipment Ltd





Single Phase Heavy Duty

The loadstar electric hoist is tremendously durable and furthermore is designed so that it will keep working even in the most demanding operations.

This hoist is recognized in the *lifting equipment* hire industry as the number 1 hoist wherever lengthy heights of lift and high duty are desirable.

The Core Features are:

- Tough yet lightweight, entirely enclosed aluminium alloy casing, offering outstanding defense of every electrical and mechanical component, but still allows easy access for servicing
 - Available in 110v 1ph 50z; 240v 1ph 50Hz and 400v 3ph 50Hz voltage options.
 - 48v control, IP65 pendant
- 50% duty - 30 minutes continuous user per hour
 - Changeable upper and lower limit switches
 - Exceptional closed height sizes
 - Lifetime lubricated gearbox
 - Thermal overload protection on the motor
 - 3 phase single speed motors are dual voltage
 - Single phase hoist arrives complete including carry handles and 1 metre supply cable fitted with cee-form plug
 - Load hook with axial bearing

Specifications:

Model	Operating voltage	Capacity (kgs)	Frame type	Falls of load chain	Lifting speed (m/min)	Closed height* (mm)
CMLS250	230v 1ph 50Hz	250	C	1	8	413
CMLS250	110v 1ph 50Hz	250	C	1	8	413
CMLS500	230v 1ph 50Hz	500	F	1	4	413
CMLS500	110v 1ph 50Hz	500	F	1	4	413
CMLS500	230v 1ph 50Hz	500	J	1	8	471
CMLS500	110v 1ph 50Hz	500	J	1	8	471
CMLS1000	230v 1ph 50Hz	1000	L	1	4	471
CMLS1000	110v 1ph 50Hz	1000	L	1	4	471
CMLS2000	230v 1ph 50Hz	2000	R	2	2	613
CMLS2000	110v 1ph 50Hz	2000	R	2	2	613
CMLS3000	230v 1ph 50Hz	3000	RT	3	1.33	751
CMLS3000	110v 1ph 50Hz	3000	RT	3	1.33	751

Model	Frame type	Load chain depth x pitch (mm)	Hoist motor (kW)	Net weight* hook suspension (kgs)	Net weight* push trolley (kgs)	Net weight* geared trolley (kgs)	Net weight* electric trolley (kgs)
CMLS250	C	6.3 x 18.9	0.37	29	40	43	84
CMLS250	C	6.3 x 18.9	0.37	30	41	44	85
CMLS500	F	6.3 x 18.9	0.37	28	39	42	83
CMLS500	F	6.3 x 18.9	0.37	29	40	43	84
CMLS500	J	7.9 x 21.7	0.75	51	62	65	106
CMLS500	J	7.9 x 21.7	0.75	52	63	66	107
CMLS1000	L	7.9 x 21.7	0.75	52	70	74	107
CMLS1000	L	7.9 x 21.7	0.75	53	71	75	108
CMLS2000	R	7.9 x 21.7	0.75	58	76	80	113
CMLS2000	R	7.9 x 21.7	0.75	59	77	81	114
CMLS3000	RT	7.9 x 21.7	0.75	64	N/A	N/A	119
CMLS3000	RT	7.9 x 21.7	0.75	65	N/A	N/A	120

* Weight for standard 3m lift. Other lifting heights on request.
 ** Additional weight for 2 speed version 2.0kgs.


LODESTAR CHAIN CONTAINERS			
Hoist	Part number	Lift height (mtrs)	Chain size (mm)
C/F	CCS-SF40	12	6.3
C/F	CCS-SF80	24	6.3
C/F	CCS-SF150	45	6.3
J-L / R / RT-RRT	CCS-LF60	18 / 9 / 5	7.9
J-L / R / RT-RRT	CCS-LF100	30 / 15 / 10	7.9
J-L / R / RT-RRT	CCS-LF150	45 / 22 / 15	7.9
J-L / R / RT-RRT	CCS-LF200	60 / 30 / 20	7.9
J-L / R / RT-RRT	CCS-LF400	120 / 60 / 40	7.9

* Top hook suspension.

Dimensions:

Model	Lodestar 250 / 500	Lodestar 500 / 1000	Lodestar 2000	Lodestar 3000
Frame type	A, B, C, F and AA	J, L, JJ and LL	R, RR	RT, RRT
A, mm	413	471	613	750
B, mm	156	194	194	194
C, mm	17	22	28	28
D, mm	279	241	241	241
F, mm	197	271	271	271
H, mm	25	30	38	38
J, mm	100	138	165	165
L, mm	122	184	157	157
M, mm	25	28	33	33
P, mm	168	198	198	198
AP, mm	235	271	284	319

CM Lodestar, hook suspension.

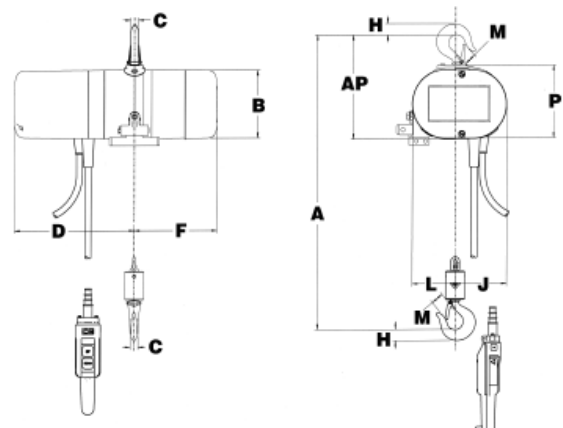

CALL US FOR MORE INFORMATION
01384 76961